




# Asus Transformer Pad TF103C Speakers Replacement

Replacing the speakers on an Asus Transformer Pad TF103C.

Written By: Tyler Ellis

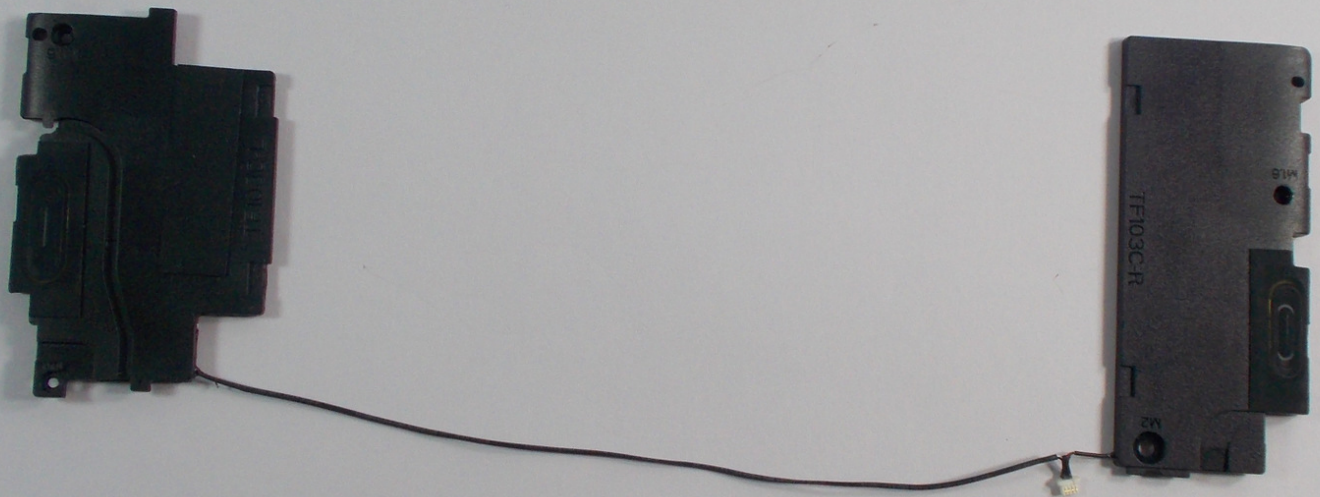




## PARTS:

- [ASUS Transformer Pad \(TF103C\) Speaker Assembly](#) (1)
-

## Step 1 — Speakers

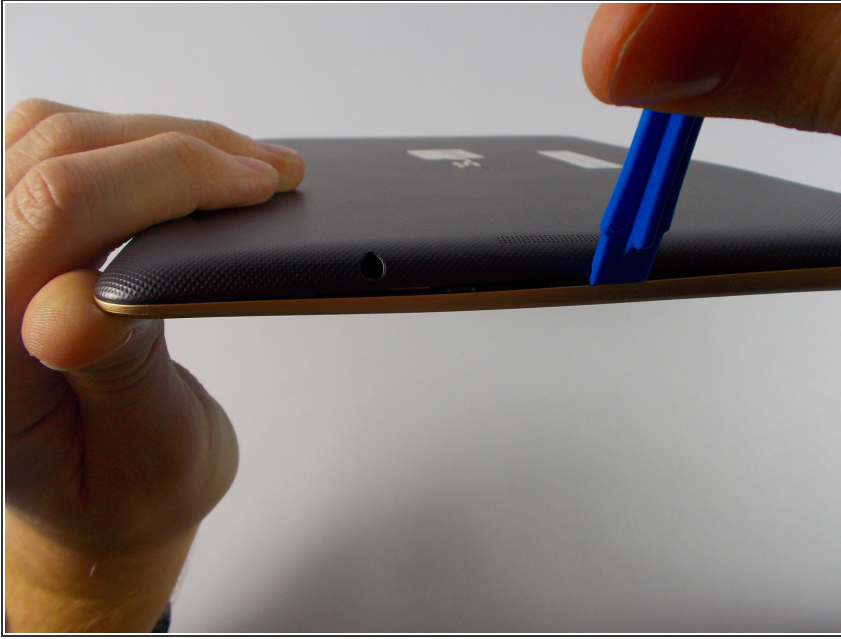

- Make sure power is off.
- Insert the plastic opening tool on the side of the tablet.
- ⓘ You can use a thin screw if you don't have an opening tool.
- Gently pull upwards and carefully pry open the Transformer pad.


## Step 2



- Slide the tool along all four edges and continue to pull the tool upwards.




## Step 3

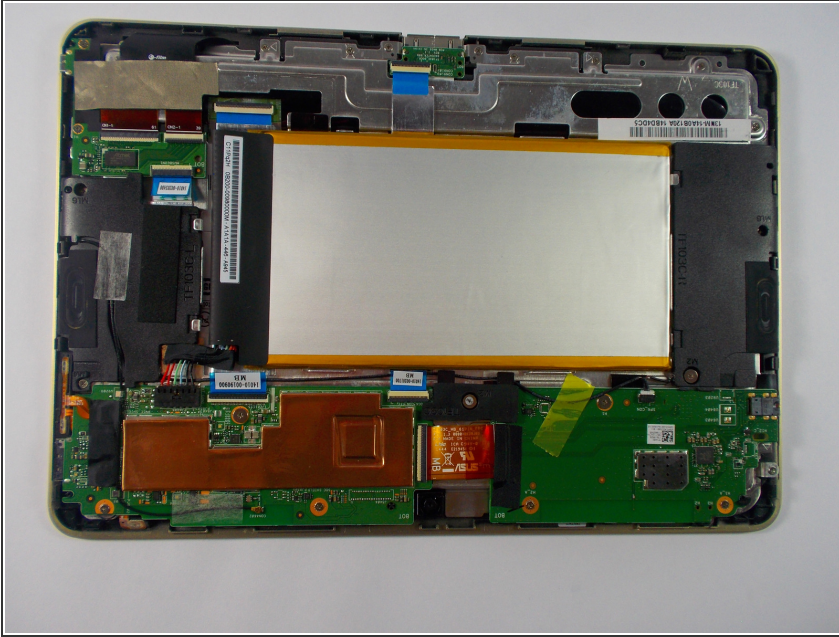


- Remove the back cover once it is detached and set it aside.
- Rotate tablet to match picture.

## Step 4

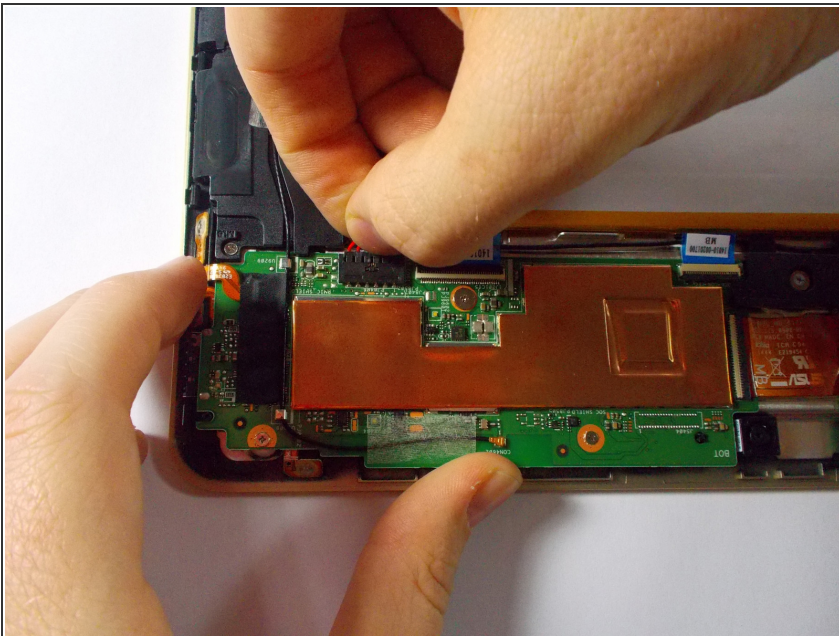



- Carefully unplug rainbow cable from motherboard.

## Step 5

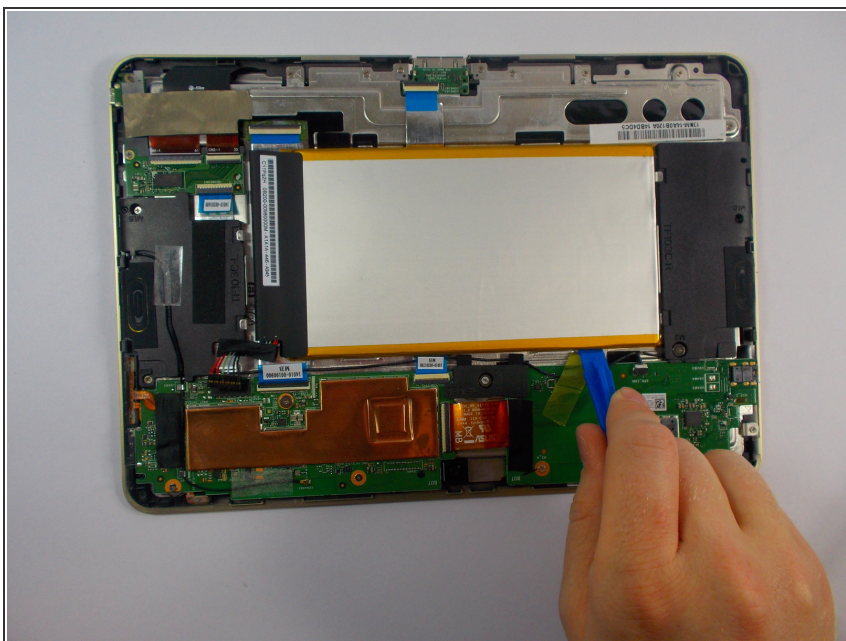

- Use plastic opening tool to carefully pry the battery out from frame.

## Step 6

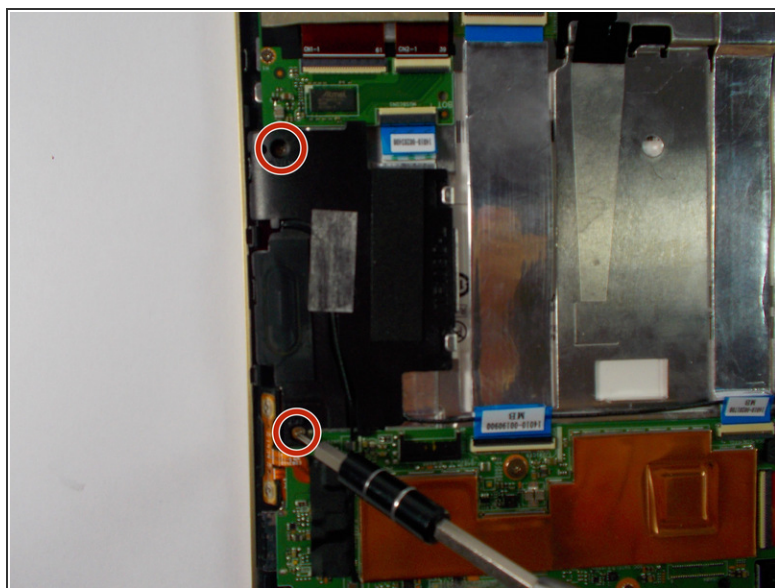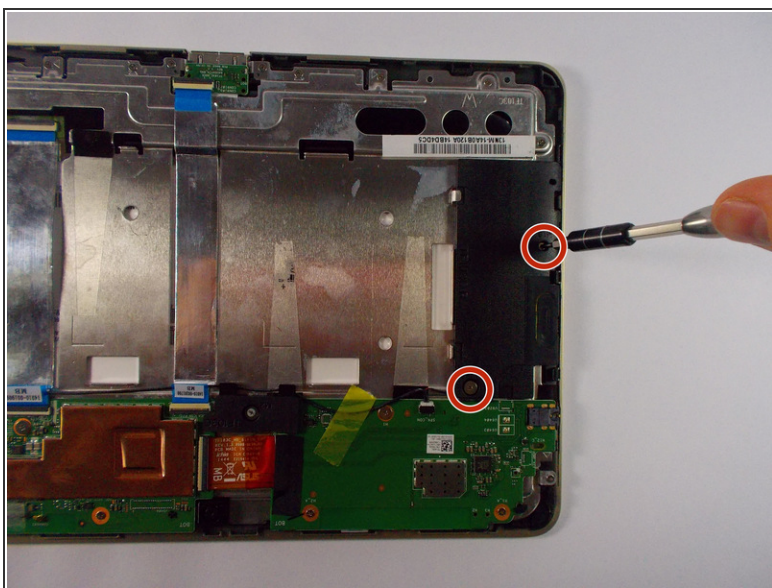


- Use the +J000 screwdriver to remove screws four from speakers.

☑ Keep the screws together and organized. (Label, if necessary).



## Step 7

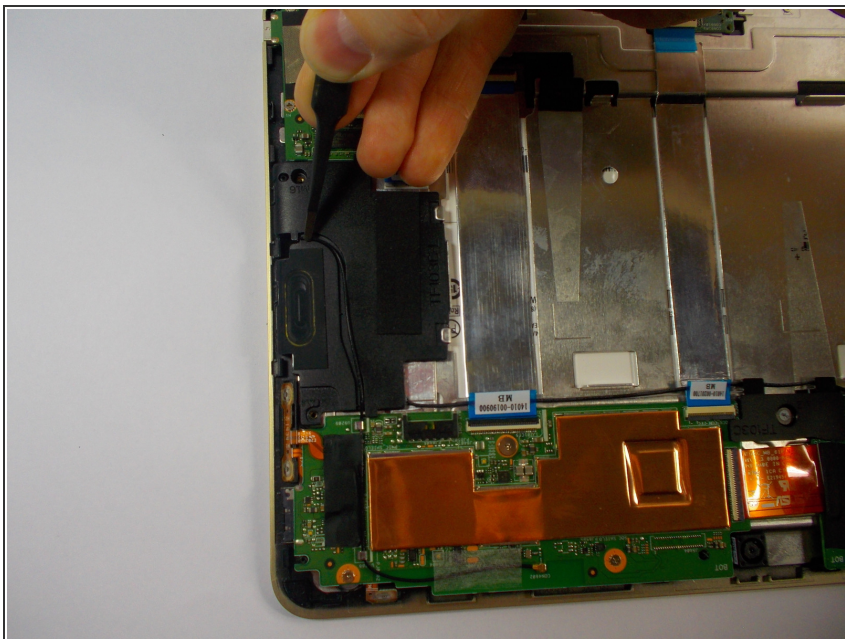


- Take ground wire out from the top of TF103C-L(Left) speaker.

⚠ If you pull on the wire to much it will break off.


ⓘ if you break the wire off you can solder it back on

## Step 8

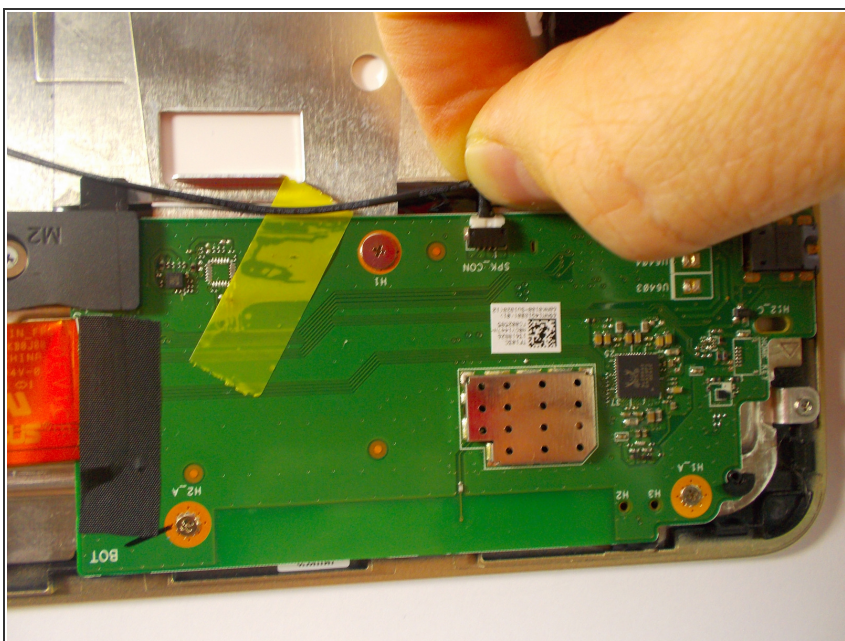

- Remove the tape and unplug wire that attaches to both speakers from soundboard.

## Step 9

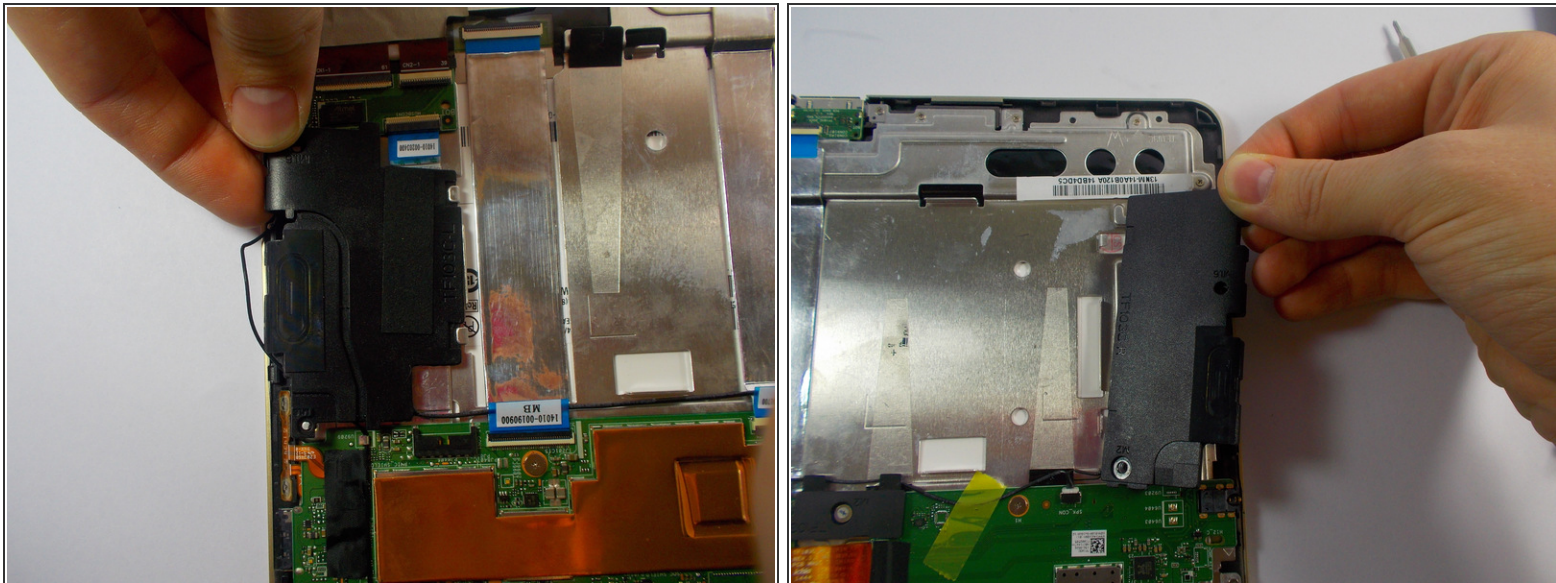

- Remove two speakers from frame.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-30 01:46:56 AM.